



# PRODUCT DATA

DIMENSIONS, TECHNICAL INFORMATION AND PERFORMANCE SPECIFICATION

## multibase 2078i



## Contents

Explanation of symbols.....	2	Entrance inclination.....	8
Parking positions.....	2	Clearances for installations.....	8
Dimensional specifications & tolerances.....	2	Electrical installation.....	9
Overview of building design.....	3	CE conformity.....	10
Vehicle data.....	3	Technical information.....	11
Overview of system types & ceiling heights.....	4	Performance specification.....	12
Width dimensions.....	5	Performances provided by customer.....	13
Width dimensions with door.....	5	Right to technical changes reserved.....	13
Width dimensions without door.....	6		
Loading schedule.....	7		

## Explanation of symbols



Platforms accessible at inclination.



Maximum load per parking space in lbs.  
Upweights above 4400 lbs possible with surcharge (see "Vehicle data", page 3).




The quoted systems correspond to DIN EN 14010 and EU Machinery Directive 2006/42/EC.



In addition, this system has undergone a voluntary conformity test by TÜV SÜD.


## Parking positions

### Lower parking space

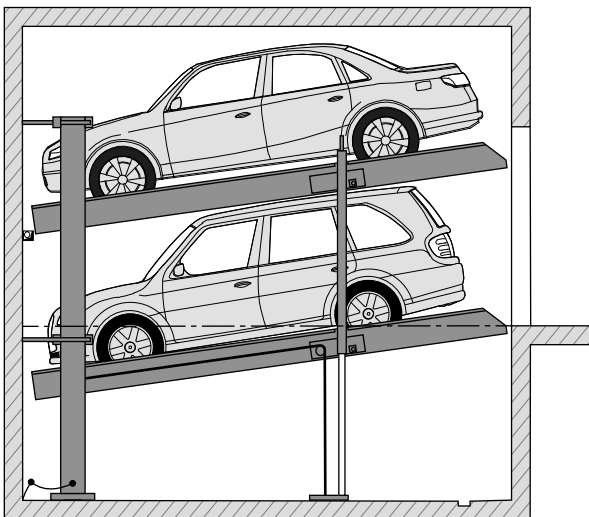

The lower vehicle can enter or exit the parking space.  
Incline of the lower platform approx.  $8^\circ = 14\%$

### Upper parking space

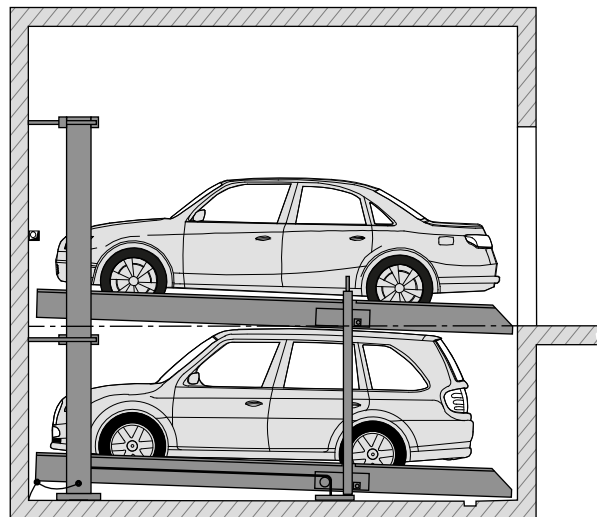

The upper vehicle can enter or exit the parking space.  
Gradient of the upper platform approx.  $2^\circ = 3.4\%$

## Dimensional specifications & tolerances




All structural dimensions are minimum finished dimensions.

Tolerance for structural dimensions:  $+3/-0$ . Dimensions in cm.


The tolerances specified in the German Construction Contract Procedures (VOB), Part C (DIN 18330 and 18331) as well as DIN 18202 must also be taken into account in order to adhere to the minimum finish dimensions.

## Overview of building design

### Building design without door

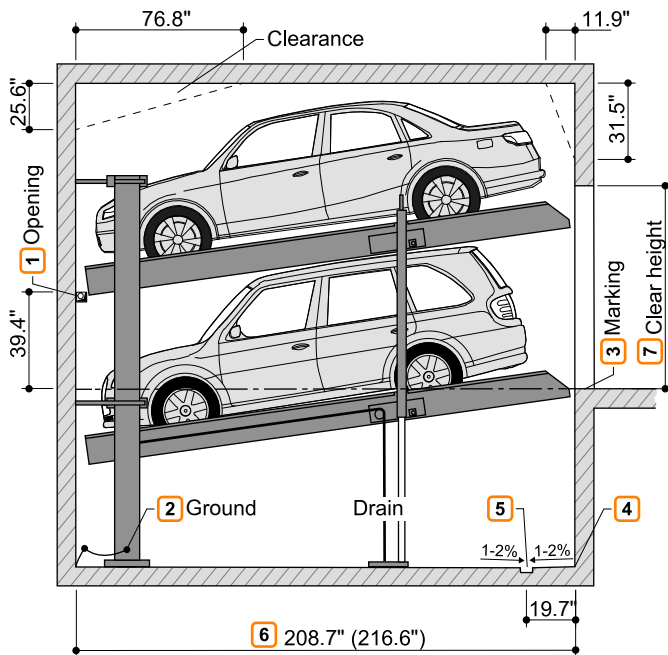

### Building design with door

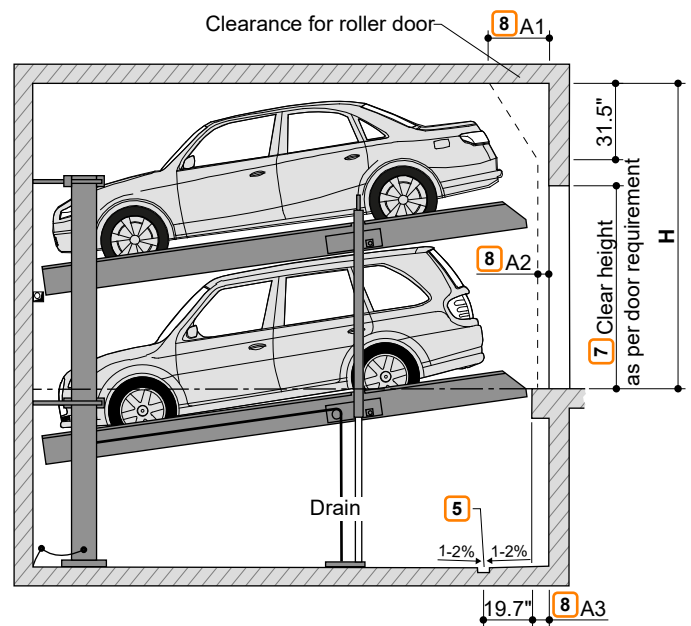

- 1 For dividing walls: Wall opening: 4" x 4".
- 2 Equipotential bonding from the foundation ground connection to the system (provided by customer).
- 3 As per DIN EN 14010, the customer must apply a 4" wide gold and black marking as per DIN ISO 3864 at the edge of the pit in the entry area to mark the danger area. (see "Loading schedule", page 7).
- 4 Grooves/concrete haunches are not possible at the transition from the pit floor and the walls. If grooves/concrete haunches are required, then the system must be narrower or the pits wider.

- 5 Slope with water collection channel (see "Drainage", page 13).
- 6 ■ 208.7" for vehicles up to 196.9" in length  
■ 216.6" for vehicles up to 204.8" in length  
Shorter designs possible upon request. Observe local regulations for parking space length!  
So that you can conveniently use your parking space and due to the ever increasing length of vehicles, we recommend a pit length of 216.6".
- 7 Clear height as per local regulations. Minimum largest possible vehicle height + 4".
- 8 The customer must coordinate dimension A1, A2 and A3 with the door manufacturer.

## Vehicle data

### Design

SP (single platform) = 2 vehicles  
DP (double platform) = 4 vehicles

### Parking options


Production vehicles:  
Sedan, station wagen, SUV, and van as per clearance gauge and maximum parking space load.

	SP			DP	
<b>Weight</b>	4400 lbs	5720 lbs	6600 lbs	4400 lbs	5720 lbs
<b>Wheel load</b>	1100 lbs	1430 lbs	1650 lbs	1100 lbs	1430 lbs


Vehicle width of 74.9" with a platform width of 90.6".  
Wider platforms allow correspondingly wider vehicles to be parked.

- 1 Vehicle height (see "Overview of system types & ceiling heights", page 4)
- 2 Vehicle length (see "Overview of building design", page 3)


### Sedan clearance gauge

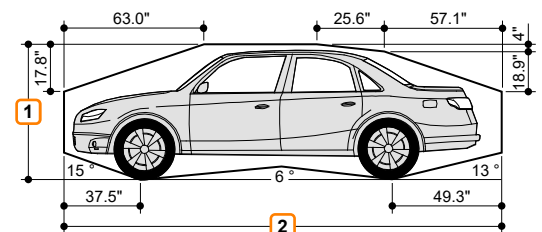

### Station wagen clearance gauge

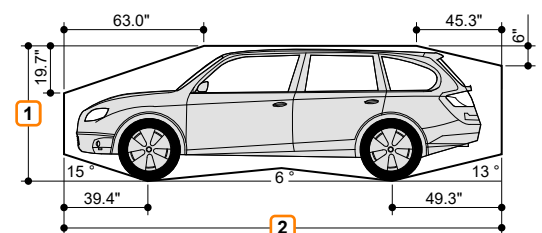

## Overview of system types & ceiling heights

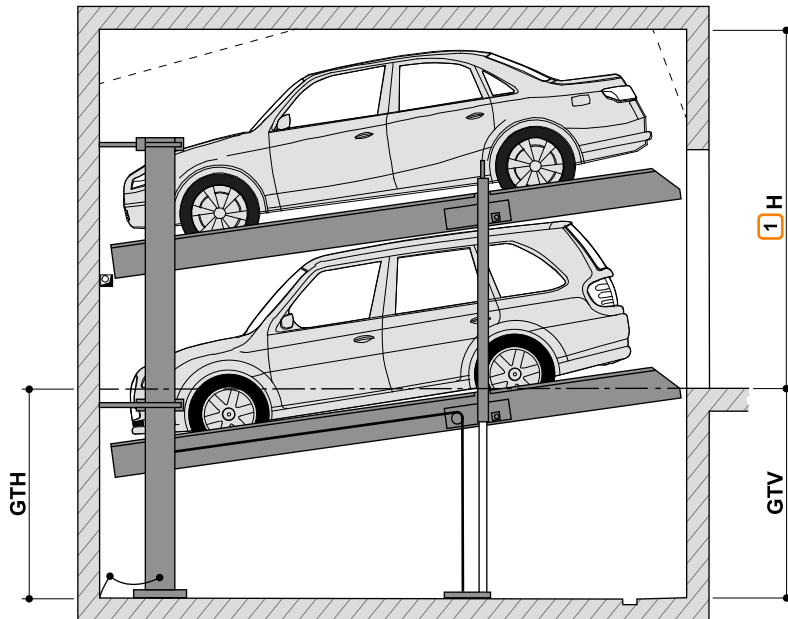

H: Building height:  
GTV: pit depth, front  
GTH: pit depth, rear

1 A higher deck height allows correspondingly taller vehicles to be parked.

Type	GTH	GTV	Lower vehicle height	Upper vehicle height, sedan																
				59.1"	61.1"	63.0"	65.0"	67.0"	68.9"	70.9"	72.9"	74.9"	76.8"	78.8"	80.8"	82.7"	84.7"			
				Upper vehicle height, station wagon																
				59.1"	61.1"	63.0"	65.0"	67.0"	68.9"	70.9"	72.9"	74.9"	76.8"	78.8"	80.8"	82.7"	86.6"			
2078i-165	65.0"	67.0"	59.1"	114.2	116.2	118.2	120.1	122.1	124.1	126.0	128.0	130.0	131.9	133.9	135.9	137.8	139.8	141.8	143.8	145.7
2078i-170	67.0"	68.9"	61.1"	116.2	118.2	120.1	122.1	124.1	126.0	128.0	130.0	131.9	133.9	135.9	137.8	139.8	141.8	143.8	145.7	147.7
2078i-175	68.9"	70.9"	63.0"	118.2	120.1	122.1	124.1	126.0	128.0	130.0	131.9	133.9	135.9	137.8	139.8	141.8	143.8	145.7	147.7	149.7
2078i-180	70.9"	72.9"	65.0"	120.1	122.1	124.1	126.0	128.0	130.0	131.9	133.9	135.9	137.8	139.8	141.8	143.8	145.7	147.7	149.7	151.6
2078i-185	72.9"	74.9"	67.0"	122.1	124.1	126.0	128.0	130.0	131.9	133.9	135.9	137.8	139.8	141.8	143.8	145.7	147.7	149.7	151.6	153.6
2078i-190	74.9"	76.8"	68.9"	124.1	126.0	128.0	130.0	131.9	133.9	135.9	137.8	139.8	141.8	143.8	145.7	147.7	149.7	151.6	153.6	155.6
2078i-195	76.8"	78.8"	70.9"	126.0	128.0	130.0	131.9	133.9	135.9	137.8	139.8	141.8	143.8	145.7	147.7	149.7	151.6	153.6	155.6	157.5
2078i-205	80.8"	82.7"	74.9"	130.0	131.9	133.9	135.9	137.8	139.8	141.8	143.8	145.7	147.7	149.7	151.6	153.6	155.6	157.5	159.5	161.5
2078i-215	84.7"	86.7"	78.8"	133.9	135.9	137.8	139.8	141.8	143.8	145.7	147.7	149.7	151.6	153.6	155.6	157.5	159.5	161.5	163.4	165.4
2078i-220	86.7"	88.6"	80.8"	135.9	137.8	139.8	141.8	143.8	145.7	147.7	149.7	151.6	153.6	155.6	157.5	159.5	161.5	163.4	165.4	167.4
2078i-230	90.6"	92.6"	84.7"	139.8	141.8	143.8	145.7	147.7	149.7	151.6	153.6	155.6	157.5	159.5	161.5	163.4	165.4	167.4	169.3	171.3

H - Building height

### Configuration example



Example: \_ Lower vehicle height of 63" & upper vehicle height of 63".

Type: \_2078i - 175

Building height: \_122.1"

Type	GTH	GTV	Lower vehicle height	Upper vehicle height, sedan																
				59.1"	61.1"	63.0"	65.0"	67.0"	68.9"	70.9"	72.9"	74.9"	76.8"	78.8"	80.8"	82.7"	84.7"			
				Upper vehicle height, station wagon																
				59.1"	61.1"	63.0"	65.0"	67.0"	68.9"	70.9"	72.9"	74.9"	76.8"	78.8"	80.8"	82.7"	86.6"			
2078i-165	65.0"	67.0"	59.1"	114.2	116.2	118.2	120.1	122.1	124.1	126.0	128.0	130.0	131.9	133.9	135.9	137.8	139.8	141.8	143.8	145.7
2078i-170	67.0"	68.9"	61.1"	116.2	118.2	120.1	122.1	124.1	126.0	128.0	130.0	131.9	133.9	135.9	137.8	139.8	141.8	143.8	145.7	147.7
2078i-175	68.9"	70.9"	63.0"	118.2	120.1	122.1	124.1	126.0	128.0	130.0	131.9	133.9	135.9	137.8	139.8	141.8	143.8	145.7	147.7	149.7
2078i-180	70.9"	72.9"	65.0"	120.1	122.1	124.1	126.0	128.0	130.0	131.9	133.9	135.9	137.8	139.8	141.8	143.8	145.7	147.7	149.7	151.6

H

## Width dimensions




We recommend a platform width of at least 250 cm and driving lane widths of 650 cm to ensure convenient vehicle access to the multiparking system and easy entry into and exit from the vehicle.

Narrower platforms can make parking more difficult, depending on the following criteria.

- Driving lane width
- Entry conditions
- Vehicle dimensions

- 1 Observe the minimum driving lane width specified by local regulations!

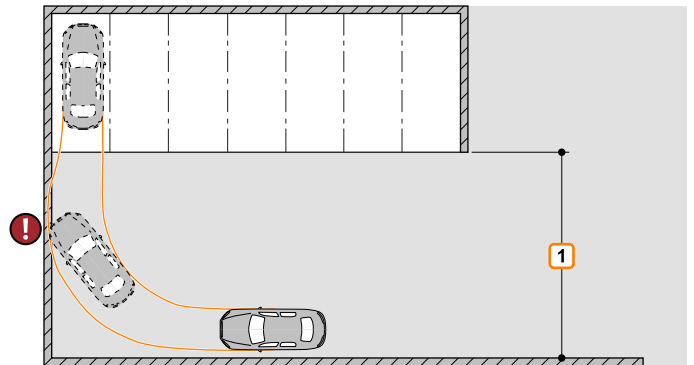

### Width dimensions with door

	Single platform – SP		Double platform – DP	
Supports outside of the pit				
	<b>Clear platform width</b>	<b>Passage width B6</b>	<b>Clear platform width</b>	<b>Passage width B6</b>
SP	90.6"	90.6"	181.2"	181.2"
	94.5"	94.5"	185.1"	185.1"
	98.5"	98.5"	189.0"	189.0"
	102.4"	102.4"	193.0"	193.0"
	106.3"	106.3"	196.9"	196.9"
DP			200.8"	200.8"
			204.8"	204.8"
			208.7"	208.7"
			212.6"	212.6"

- 1 Door offset (customer must coordinate dimension A3 with the door manufacturer). Lateral closing doors require coordination between the door manufacturer and KLAUS Multiparking.

Width dimensions without door

	Single platform – SP	Double platform – DP	Combination as example			
Dividing walls						
Supports in the pit						
Supports outside the pit						
	Clear platform width	Dividing walls B1	Support in the pit B2      B3		Support outside the pit B4      B5	
SP	90.6"	102.4"	100.4"	96.5"	98.5"	94.5"
	94.5"	106.3"	104.4"	100.4"	102.4"	98.5"
	98.5"	110.3"	108.3"	104.4"	106.3"	102.4"
	102.4"	114.2"	112.3"	108.3"	110.3"	106.3"
	106.3"	118.2"	116.2"	112.3"	114.2"	110.3"
DP	181.2"	193.0"	191.0"	187.1"	189.0"	185.1"
	185.1"	196.9"	194.9"	191.0"	193.0"	189.0"
	189.0"	200.8"	198.9"	194.9"	196.9"	193.0"
	193.0"	204.8"	202.8"	198.9"	200.8"	196.9"
	196.9"	208.7"	206.7"	202.8"	204.8"	200.8"
	200.8"	212.6"	210.7"	206.7"	208.7"	204.8"
	204.8"	216.6"	214.6"	210.7"	212.6"	208.7"
	208.7"	220.5"	218.6"	214.6"	216.6"	212.6"
212.6"	224.5"	222.5"	218.6"	220.5"	216.6"	
Combination	90.6" + 181.2"	295.3"	293.4"	289.4"	291.4"	287.5"
	94.5" + 185.1"	303.2"	301.2"	297.3"	299.3"	295.3"
	98.5" + 189.0"	311.1"	309.1"	305.2"	307.1"	303.2"
	98.5" + 196.9"	318.9"	317.0"	313.0"	315.0"	311.1"
	106.3" + 196.9"	326.8"	324.9"	320.9"	322.9"	318.9"
	106.3" + 200.8"	330.8"	328.8"	324.9"	326.8"	322.9"
	106.3" + 204.8"	334.7"	332.7"	328.8"	330.8"	326.8"
	106.3" + 208.7"	338.6"	336.7"	332.7"	334.7"	330.8"
106.3" + 212.6"	342.6"	340.6"	336.7"	338.6"	334.7"	


## Loading schedule



The systems are doweled to the floor. The depth of the boreholes in the floor plate is approximately 15 cm, and approximately 12 cm in the walls.

Floor plates and walls below the level of the entrance must be made of concrete (concrete quality at least C20/25)!

The dimensions for the bearing points have been rounded. If you need to know the exact position, please contact KLAUS Multiparking.

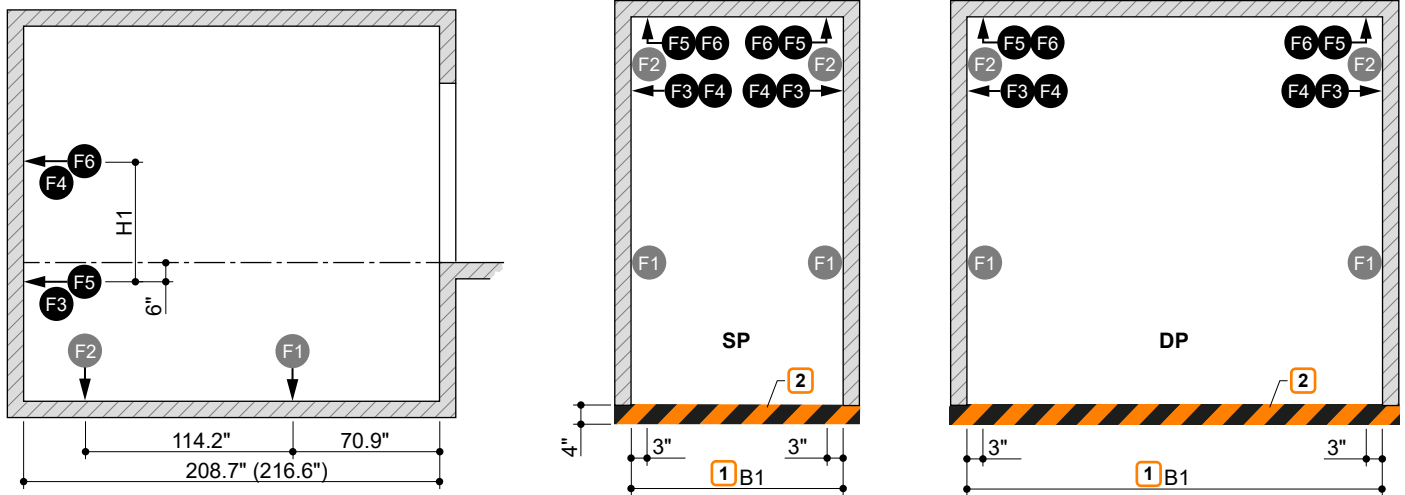

1 Width dimension B1 (see "Width dimensions without door", page 6)


2 Marking as per DIN ISO 3864 (coloring of the marking corresponds to DIN ISO 3864)

Parking space load	F1	F2	F3	F4	F5	F6	Type	H1	
SP	4400 lbs	+ 6295 lbf - 383 lbf	+ 2698 lbf	± 225 lbf	± 180 lbf	± 428	± 428	2078i-165	59.1"
	5720 lbs	+ 8094 lbf - 495 lbf	+ 3373 lbf	± 293 lbf	± 225 lbf	± 540 lbf	± 540 lbf	2078i-170	61.1"
	6600 lbs	+ 9442 lbf - 540 lbf	+ 3822 lbf	± 338 lbf	± 270 lbf	± 607	± 607	2078i-175	63.0"
DP	4400 lbs	+ 11466 lbf - 1507 lbf	+ 4497 lbf	± 360 lbf	± 585 lbf	± 765 lbf	± 765 lbf	2078i-180	65.0"
	5720 lbs	+ 15063 lbf - 1934 lbf	+ 5846 lbf	± 473 lbf	± 765 lbf	± 990	± 990	2078i-185	67.0"
		2078i-190	68.9"						
		2078i-195	70.9"						
		2078i-205	74.9"						
2078i-215	78.8"								
2078i-220	80.8"								
2078i-230	84.7"								


## Entrance inclination



The maximum entry inclinations specified in the sketch must not be exceeded. An incorrect design can make driving into the system considerably more difficult, for which KLAUS Multiparking is not responsible.

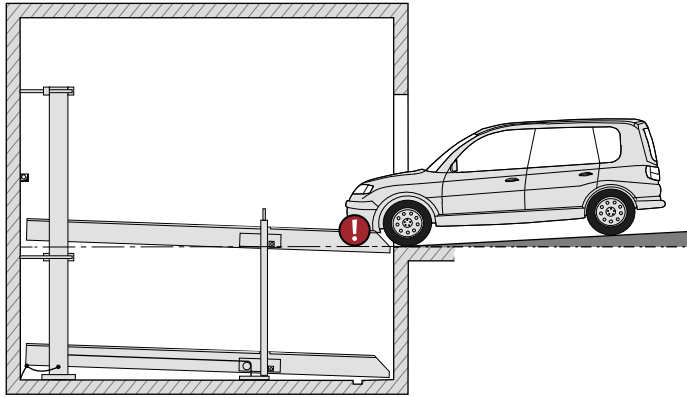

Max. slope: 14%


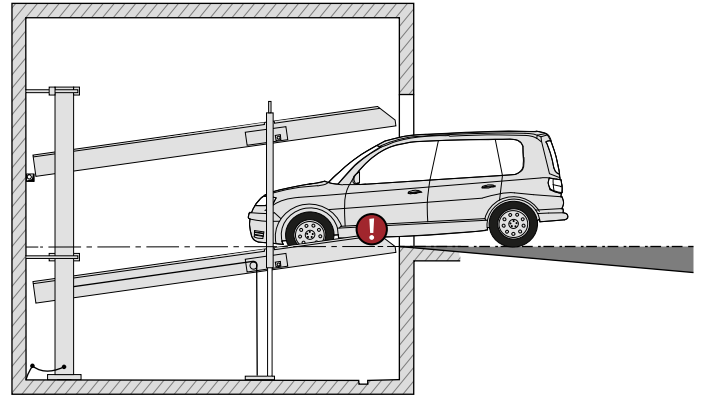


Max. gradient: 2%

## Clearances for installations



These clearances apply exclusively to vehicles parked forward with exit on the left. The clearances must be adjusted accordingly for vehicles with exit on the right or if vehicles are backed into the parking space.

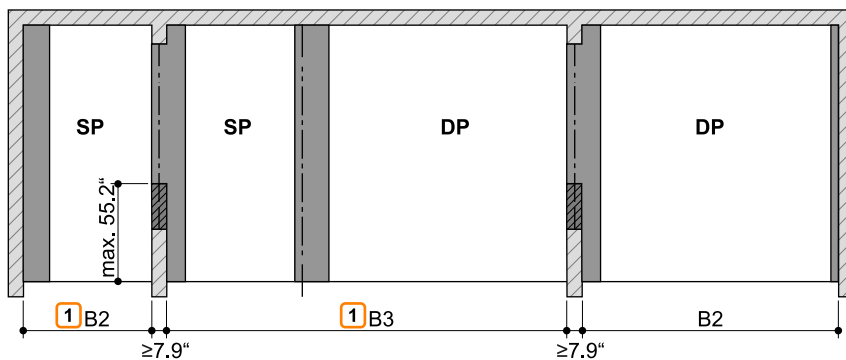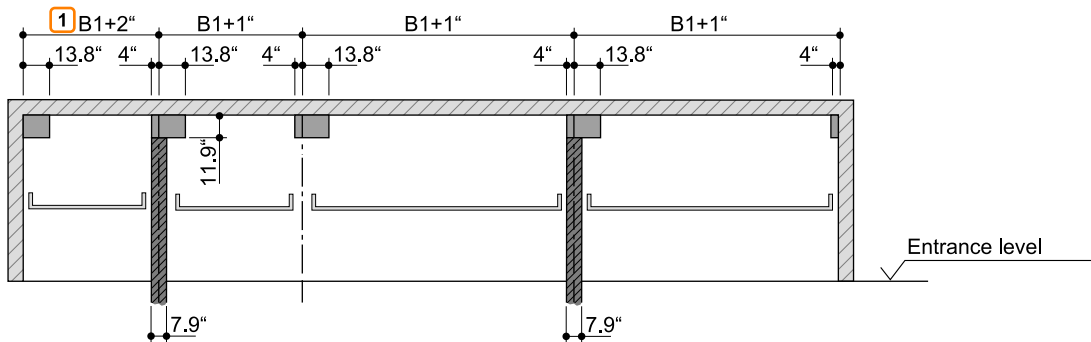


1 Dimensions B1, B2 and B3 (see "Width dimensions without door", page 6)

- Clearance for routing lines lengthways
- Clearance for vertical pipes, ventilation ducts, etc.




## Electrical installation

### Electrical installation diagram

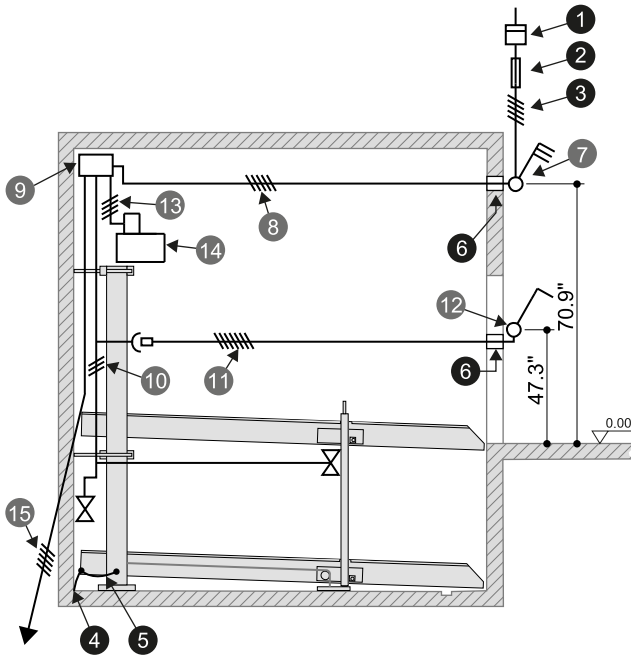

### Performances provided by customer for operating elements

#### Surface-mounted operating element



### Register of electrical performances (provided by customer)

No.	Quantity	Designation	Position	Frequency
1	1	Power meter	In the supply cable	
2	1	Pre-fuse: 2x fuse 32 A (time-lag) or Circuit breaker 2 x 32 (tripping characteristic K or C)	In the supply cable	1x per 3.7-kW unit
		3x fuse 25 A (time-lag) or Circuit breaker 3 x 25 A (tripping characteristic K or C)	In the supply cable	1x per 4.0-kW unit
3	1	Supply cable 3 x AWG 10 (2 PH+PE) with labeled conductors and protective ground	to master switch	1x per 3.7-kW unit
		Supply cable 4 x AWG 12 (3 PH+PE) with labeled conductors and protective ground	to master switch	1x per 4.0-kW unit
4	Every 393.8"	Foundation ground connection	Corner of pit floor	
5	1	Equipotential bonding as per DIN EN 60204 from the foundation ground connection to the system		1x per system
6	2	Empty conduit EN 25 (M25)		

### Register of electrical performances – in conformity with UL/CSA (scope of supply of KLAUS Multiparking)

No.	Designation
7	Lockable master switch
8	Supply cable 4 x AWG 10 (2 PH+PE) with labeled conductors and protective ground for 3.7-kW unit
	Supply cable 4 x AWG 12 (3 PH+PE) with labeled conductors and protective ground for 4.0-kW unit
9	Unit junction box
10	Multiparker wiring harness
11	Connection cable (operating element)
12	Operating element
13	Control cable 4 x AWG 14 with labeled conductors and protective ground
14	Hydraulic unit, 3.7 kW, two-phase current, 240 V / 60 Hz
	Hydraulic unit, 4.0 kW, three-phase current, 120/208 V / 60 Hz
15	Connection cable to the next system

**CE conformity**

The quoted systems correspond to DIN EN 14010 and EU Machinery Directive 2006/42/EC. In addition, this system has undergone a voluntary conformity test by TÜV SÜD.

ZERTIFIKAT ◆ CERTIFICATE ◆ 認証証書 ◆ CERTIFICADO ◆ CERTIFICAT	 Industrie Service	
	<b>Certificate concerning the examination of conformity</b>	
	<b>Certificate no:</b>	KP 454
	<b>Certification body:</b>	TÜV SÜD Industrie Service GmbH Zertifizierungsstelle für Produkte der Fördertechnik Gottlieb-Daimler-Str. 7 70794 Filderstadt - Germany
	<b>Applicant / Certification holder:</b>	KLAUS Multiparking GmbH Hermann-Krum-Str. 2 88319 Aitrach - Germany
	<b>Date of application:</b>	2015-06-12
	<b>Manufacturer:</b>	KLAUS Multiparking GmbH Hermann-Krum-Str. 2 88319 Aitrach - Germany
	<b>Product:</b>	Equipment for power driven parking of motor vehicles
	<b>Type:</b>	MultiBase 2072i / 2078i EB 2.000 kg, 2.600 kg, 3.000 kg MultiBase 2072i / 2078i DB 2.000 kg, 2.600 kg
	<b>Test laboratory:</b>	TÜV SÜD Industrie Service GmbH Prüflaboratorium für Produkte der Fördertechnik Prüfbereich Maschinen der Fördertechnik Gottlieb-Daimler-Str. 7 70794 Filderstadt – Germany
	<b>Date and number of the test report</b>	2016-08-09 KP 454
	<b>mark of conformity:</b>	KP 454
	<b>Test specifications:</b>	- 2006 / 42 / EC, Annex I - DIN EN 14010
	<b>Validity:</b>	This Certificate is valid until <b>2021-08-08</b>
<b>Result:</b>	The equipment fulfills the requirements of the test specifications for the respective scope of application stated in the annex (page 1) of this certificate, keeping the mentioned conditions.	
<b>Date of issue:</b>	2016-08-09	
Certification body "lifts and cranes"  Achim Janocha		
 		

## Technical information

### Area of use

In general, the system is best suited for a fixed group of users. Structural adjustments to the multiparking system are required to accommodate a changing group of users (only in the upper parking spaces), e.g., short-term parkers in office buildings or hotels. If needed, please contact us.

### Units

Low-noise power units mounted to rubber-bonded-to metal mountings are installed. Nevertheless, we recommend separating the garage body from the residential building.

### Environmental conditions

Environmental conditions for the area of multiparking systems. Temperature range -20 to +40° C. Relative humidity 50% and a maximum outside temperature of +40° C. If raising and lowering times are specified, they refer to an ambient temperature of +10° C and a system arranged directly next to the hydraulic unit. These times increase at lower temperatures or with longer hydraulic lines.

### Seismic considerations

Local seismic conditions might require special precautionary measures such as struts. Please contact KLAUS Multiparking for seismic reports and advice.

### Building permit documents

Multiparking systems are usually subject to approval. Please observe local regulations and ordinances in this regard.

### Care

To prevent corrosion damage, please observe our separate cleaning and care instructions, and make sure that your garage is well ventilated.

### Corrosion protection

As per "Corrosion Protection" supplement.

### Railing

If the permissible fall opening is exceeded, railings are attached to the systems. If traffic routes are located immediately next to or behind the systems, then the customer must provide barriers as per DIN EN ISO 13857. This applies during the construction phase as well.

### Noise protection

#### Normal noise protection:

As per DIN 4109-1 "Sound Insulation in Buildings – Part 1: Minimum Requirements," section 9:

The maximum sound pressure level in living and sleeping spaces is 30 dB (A).

User noises are not subject to the requirements.

The following actions are required to comply with this value:

- Noise protection package as per quotation/order (KLAUS Multiparking)
- Sound reduction index of the structure at least  $R'w = 57$  dB (customer-provided performance)

#### Increased noise protection (separate agreement):

As per DIN 4109-5 "Sound Insulation in Buildings – Part 5: Increased Requirements," section 8:

Maximum sound pressure level in living and sleeping spaces 25 dB (A).

User noises are not subject to the requirements.

The following actions are required to comply with this value:

- Noise protection package as per quotation/order (KLAUS Multiparking)
- Sound reduction index of the structure at least  $R'w = 62$  dB (customer-provided performance)

#### Note:

User noises are noises that can be influenced individually by the user of our multiparking systems. This includes, e.g., driving onto the platform, slamming vehicle doors, engine noises and breaking noises.

## Performance specification

### Description

Multiparking system for independent parking of 2 vehicles (single platform – SP), 2 x 2 vehicles (double platform – DP) on top of each other.

Dimensions as per the underlying pit, width and height dimensions.

Access to upper parking spaces inclined (approx. 2° gradient).

Access to lower parking spaces inclined (approx. 8° incline).

The special arrangement of the lifting and bearing structure allows doors to be opened without restrictions.

A vehicle positioning aid is mounted on one side of each parking space (must be adjusted as per operating instructions).

Operation using one operating element with automatic return via common key.

The operating element is usually attached in front of the support or outside on the door jamb.

Brief instruction at each operating point.

In the case of a building design with a door, special dimensions must be observed.

### Multiparking system consisting of:

- 2 columns (anchored to the floor)
- 2 sliding pieces (with slideways fastened to the columns)
- 2 platforms
- 1 electrohydraulic synchronization system (to ensure that the hydraulic cylinders run synchronously during raising and lowering)
- 2 hydraulic cylinders
- 2 rigid supports (connection of the platforms)
- 2 chains and chain deflection pulleys
- Dowels, bolts, fasteners, pins, etc.
- The platforms are end-to-end accessible for parking!

### Platforms consisting of:

- Platform profiles
- Adjustable positioning aid
- Chamfered access plates
- Side beams
- Center beam (DP only)
- Crossbeams (long and short crossbeams for DP)
- Railings (on the top and bottom platform, if needed)
- Bolts, nuts, washers, spacer tubes, etc.

### Hydraulic system consisting of:

- Hydraulic cylinders
- Solenoid valves
- Hydraulic lines
- Threaded connections
- High-pressure hoses
- Fasteners

### Electrical system consisting of:

- Operating element (emergency-stop, lock, 1 common key per parking space)
- Control unit with wiring harness and sensors

### Hydraulic unit consisting of:

- Hydraulic unit (low-noise, mounted on a console with rubber-bonded-to-metal mountings)
- Hydraulic oil tank
- Oil fill
- Internal gear pump
- Pump carrier
- Coupling
- Three-phase motor
- Contactor, motor protection switch and control fuse
- Test pressure gage
- Pressure relief valve
- Hydraulic hoses (damping of noise transmission to the hydraulic pipes)

## Performances provided by customer

### Barriers

Any barriers required to secure the parking system pit due to traffic routes located immediately in front of, next to or behind the systems as per DIN EN ISO 13857. This applies during the construction phase as well. Any railings needed on the systems are included as standard.

### Parking space numbering

Any parking space numbering required.

### Technical building systems

Any required lighting, ventilation, fire extinguishing systems and fire alarm systems, as well as clarification and fulfillment of the associated legal requirements.

### Lighting

The customer must observe local regulations regarding the lighting of parking spaces and roadways. As per DIN EN 12464-1 "Light and Lighting – Lighting of Work Places – Part 1: Indoor Work Places" an illuminance of at least 200 lx is recommended for parking spaces and the operating area of the system.

### Drainage

Functional drainage of the pit provided by, e.g., a water collection channel in the front area connected to the sewer system or a sump. A lateral slope is possible within the channel but not in the rest of the pit area (a lengthways slope is provided by the structural dimension). As an environmental protection measure, we recommend that the pit floor be painted. Oil or gasoline separators must be appropriately taken into account as per local regulations when the drain is attached to the sewer system.

### Strip foundations

If strip foundations are used for structural reasons, the customer must construct a walkable platform at the height of the upper edge of the strip foundations so that the assembly work can be performed.

### Warning markings

As per DIN EN 14010, the customer must apply a 10-cm wide gold and black marking as per DIN ISO 3864 at the edge of the pit in the entry area to mark the danger area.

### Wall openings

Any required wall openings as per sectional drawings (see "Overview of building design", page 3).

### Supply cable to the master switch – foundation ground

The customer must provide the supply cable to the master switch during assembly. Our fitter can check functionality on site together with the electronics technician. If this is not possible during assembly due to reasons for which the customer is responsible, then the customer must contract an electronics technician.

The customer must ground the steel structure using the foundation ground connection (max. ground distance 10 m) and equipotential bonding as per DIN EN 60204.

### Operating element

Empty conduits and cutouts for the operating elements (see "Electrical installation", page 9). Consultation with KLAUS Multiparking is required for folding doors.

## Right to technical changes reserved.

In carrying out its performances in the course of technical progress, KLAUS Multiparking is free to use new or different technologies, systems, processes or standards than those initially quoted, provided this does not result in any disadvantages for the customer.

### KLAUS Multiparking GmbH

Hermann-Krum-Straße 2  
88319 Aitrach / Germany

+49 (0) 7565 508-0

info@multiparking.com  
www.multiparking.com

